



# Gasket router HDF

Gasket router for milling the seal

## HDF4-4

Gasket router for milling the seal

### DESCRIPTION:

- simultaneous work at two profile-ends in one operation
- automatic adjustment of the limit stop / glas-sealposition
- casement-profile: milling of the stop, center and glass seal
- blind-frame-profile: relief-milling of the limit stop- and glas seal
- easy handling
- elasticity of the seal will survive after welding
- SPS control
- Plexiglasprotection

### Horizontal profilelaunch

- max. profilewidth: 90 mm
- max. profileheight: 130 mm
- min. profileheight: 50 mm


### Options

- extendable supporting table 800 mm
- fixed supporting table 1300 mm
- extraction system

### TECHNICAL DATA:

Voltage	400V, 3 ~, 50/60 Hz
Power	0,55 kW / Motor
Air connection	6-8bar
Weight	110kg
Length	900mm
Width	450-550mm
Height	1700-1800mm

### DETAILS / OPTIONS:

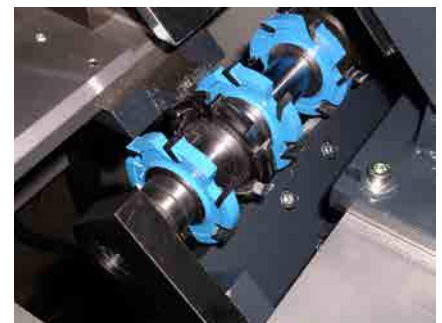

### ORDER NUMBERS:

32000001 HDF4-2 Gasket router  
 32000000 HDF4-2BL Gasket router  
 32000002 HDF4-1 Gasket router  
 33000000 HDF4-3 Gasket router  
 31000000 HDF4-4 Gasket router  
 31000001 HDF4-4 BL Gasket router  
 31000002 HDF4-29 Gasket router  
 32000003 HDF4-2V Gasket router

### Optionen

31000200 Lay-on arm extendable 800mm  
 31000300 Lay-on arm fixed 1300mm  
 31000100 Additional cutting disks (2 Stk) for outwards opening profiles  
 20001034 Suction system  
 31000101 Automatic change of the alu-bridge for Schüco SI82 +